


## SECTION A-A

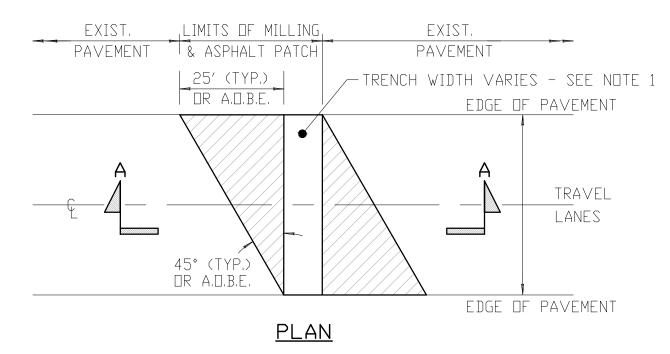

## NOTES:

- 1. THE CONTRACTOR SHALL HAVE BACKFILLED, COMPACTED, AND PROPERLY PAVED AND ROLLED UP TO FINAL GRADE WITHIN THE OPEN CUT AREA PRIOR TO MILLING OF THE FINAL PATCH.
- 2. IF BINDER COURSE IS LEFT EXPOSED OVER WINTER, IT SHALL BE KEYED INTO THE EXISTING PAVEMENT WITH A 3" RECESS.
- 3. FOR GUIDANCE ON SUB SURFACE WORK, REFER TO M.C.D.O.T. DETAIL TITLED "TRENCH AND PAVEMENT RESTORATION FOR ROAD CUT".
- 4. JOINTS SHALL BE SAWCUT AND TACK COAT APPLIED PRIOR TO FINAL PAVING.
- 5. AFTER FINAL PAVING THE JOINTS SHALL BE SEALED WITH FIBER CRACKFILL.

## ASPHALT PATCH OVER FULL DEPTH TRENCH REPLACEMENT

9/17/14

NOT TO SCALE