

MONROE COUNTY DEPARTMENT OF TRANSPORTATION

WELCOMES YOU TO A
PUBLIC INFORMATION MEETING

For

West Bloomfield Road Culvert Over Irondequoit Creek Tributary

Town of Mendon



Tuesday, September 20, 2016

This meeting is being held to allow interested parties to review the project plans in an informal setting, comment, and ask questions of the Monroe County Department of Transportation and Consultant Design Staff. There will be a short presentation followed by a period for additional questions and comments.

The schedule for the meeting is as follows:

Short Presentation 7:00 PM


Questions Immediately Following Presentation



Detour Route:

Approximate length: 2.5 miles

Approximate Travel Time: 4 minutes

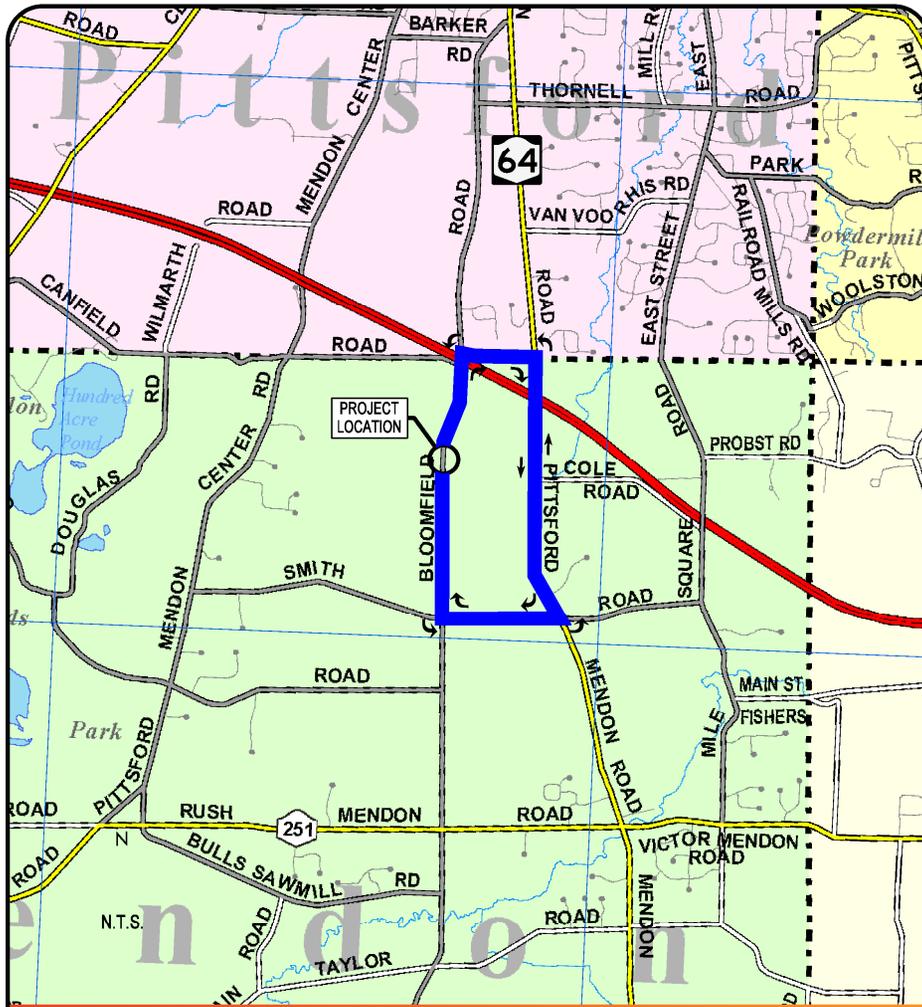

61 Commercial Street, Suite 100
Rochester, NY 14614
(585) 475-1440
www.stantec.com

DETOUR MAP

WEST BLOOMFIELD ROAD OVER IRONDEQUOIT CREEK TRIBUTARY
TOWN OF MENDON, MONROE COUNTY, NEW YORK
S.I.N. 09-066-590

Project Location:

West Bloomfield Road over Irondequoit Creek Tributary is located 0.5 mile south of the New York State Thruway and 0.9 mile north of Smith Road (CR 47).

Project Objective:

Provide a cost effective, durable and maintenance free solution to the structural, hydraulic, and geometric deficiencies of the existing crossing, meeting the latest design standards.

Proposed Alternative:

Replacement of the existing culvert with a 60 inch diameter steel reinforced high density polyethylene (HDPE) pipe.

Roadway Information

	<u>Existing</u>	<u>Proposed</u>
Travel Lanes:	10 ft. asphalt	10 ft. asphalt
Shoulders:	1 ft. +/- asphalt	4 ft. asphalt
Sidewalks:	None	None

Structure Information

	<u>Existing</u>	<u>Proposed</u>
Year Constructed:	1929, lengthened in 1950	2018
Material:	Concrete	HDPE Pipe
Type:	4- Sided Box	Pipe
Length:	38.5 feet	96.5 feet

General Information

Additional Right-of-Way: Permanent easements for construction and new structures will be required.

Pedestrian Access: Pedestrians will not be allowed in the area during construction.

Environmental Classification and Permits: SEQRA Type II
Joint NYSDEC/USACOE Permit Application

Maintenance of Traffic: An off-site detour will be used during construction to maintain traffic. The detour will use Smith Road (CR 47), NY Route 64 and Canfield Road (CR 31).

Anticipated Schedule: Begin Construction - Summer 2018
End Construction - Fall 2018

Contact Person: Thomas Polech, PE 585.753.7747
ThomasPolech@monroecounty.gov